SIEMENS

Data sheet 3RW40 75-6BB44



SIRIUS SOFT STARTER, S12, 356 A, 200 KW/400 V, 40 DEG., 200-460 V AC, 230 V AC, SCREW TERMINALS

General technical data:				
product brand name		SIRIUS		
Product feature				
 integrated bypass contact system 		Yes		
Thyristors		Yes		
Product function				
 Intrinsic device protection 		Yes		
 motor overload protection 		Yes		
 Evaluation of thermistor motor protection 		No		
External reset		Yes		
 Adjustable current limitation 		Yes		
• inside-delta circuit		No		
Product component Motor brake output		No		
Equipment marking acc. to DIN EN 61346-2		Q		
Equipment marking acc. to DIN 40719 extended		G		
according to IEC 204-2 acc. to IEC 750				

Power Electronics:			
Product designation		soft starters for standard applications	
Operating current			
● at 40 °C Rated value	Α	356	
● at 50 °C Rated value	Α	315	
● at 60 °C Rated value	Α	280	
Mechanical power output for three-phase motors			
● at 230 V			

at standard circuit at 40 °C Rated value • at 400 V at standard circuit at 40 °C Rated value • at 400 V at standard circuit at 40 °C Rated value yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C Relative negative tolerance of the operating frequency Rated value Relative positive tolerance of the operating frequency Relative positive tolerance of the operating frequency Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C Mortive power loss at operating current at 40 °C during operation typicing control supply voltage frequency 1 Rated value Relative negative tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Rel			
rest standard circuit at 40 °C Rated value vielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 60 °C Rated value Operating frequency Rated value Relative negative tolerance of the operating frequency frequency relative tolerance of the operating frequency relative tolerance of the operating frequency relative positive tolerance of the operating voltage at standard circuit Rated value Operating voltage at standard circuit Rated value Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C Active power loss at operating current at 40 °C during operation typical Control supply voltage frequency 1 Rated value Hz Control supply voltage frequency 2 Rated value **a 160 Hz	 — at standard circuit at 40 °C Rated value 	W	110 000
yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C Rated value Operating frequency Rated value Relative negative tolerance of the operating frequency Relative negative tolerance of the operating frequency Relative negative tolerance of the operating frequency Relative negative tolerance of the operating voltage at standard circuit Rated value Relative negative tolerance of the operating voltage at standard circuit Relative negative tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM A	● at 400 V		
AC motor at 200/208 V at standard circuit at 50 °C Rated value Relative negative tolerance of the operating frequency (Parating frequency) Relative positive tolerance of the operating frequency (Parating voltage at standard circuit Rated value (Parating voltage at standard circuit Rated value (Parating voltage at standard circuit Rated value (Parating voltage at standard circuit (Parating voltage (Parating voltage at standard circuit (Parating voltage (Parat	 — at standard circuit at 40 °C Rated value 	W	200 000
Relative negative tolerance of the operating frequency Relative positive tolerance of the operating ovitage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current (% of le) at 40 °C Active power loss at operating current at 40 °C during operation typical Control supply voltage frequency 1 Rated value Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Control supply voltage frequency 2 Rated value Paleative negative tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage frequency Control supply voltage frequency Control supply voltage frequency Control supply voltage frequency Control supply voltage frequency Control supply voltage frequency Control supply voltage frequency W 230 Relative negative tolerance of the control supply voltage frequency Control supply voltage frequency W 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Belative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal M 78 M 10 M 10 M 10 M 10 M 230 M 278		metric	100
Relative negative tolerance of the operating frequency Relative positive tolerance of the operating frequency Relative positive tolerance of the operating frequency Relative positive tolerance of the operating frequency Operating voltage at standard circuit Rated value Relative negative tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C Active power loss at operating current at 40 °C during operation typical Operation typical Control supply voltage frequency 1 Rated value Part of voltage of the control supply voltage Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated		hp	
Relative negative tolerance of the operating frequency Relative positive tolerance of the operating frequency Relative positive tolerance of the operating frequency Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current at 40 °C during operating voltage at protection minimum rated value Continuous operating current at 40 °C during operating voltage frequency 1 Rated value Control supply voltage frequency 1 Rated value Control supply voltage frequency 1 Rated value Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tol			
frequency Relative positive tolerance of the operating frequency Operating voltage at standard circuit Rated value V 200 460 Relative negative tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Minimum load in % of LM Minimum load in % of LM Adjustable motor current for motor overload Adjustable motor current for motor overload Adjustable motor current for motor overload Adjustable motor current for for for overload Adjustable motor current for for for overload Aditive prover loss at operating current at 40 °C during operation typical **Operation overload for the control supply voltage Control supply voltage frequency 1 Rated value Hz 50 Control supply voltage frequency 1 Rated value Hz 60 Control supply voltage frequency 1 Rated value Hz 60 Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value **V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive toleranc			50 60
Operating voltage at standard circuit Rated value Relative negative tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current (% of le] at 40 °C McIty power loss at operating current at 40 °C during operation typical Control supply voltage frequency 1 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply woltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage frequency 1 Rated value Relative positive tolerance of the control supply voltage frequency Control supply voltage frequency Control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value • at 60 Hz Rated value		%	-10
Relative negative tolerance of the operating voltage at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C Active power loss at operating current at 40 °C during operation typical Control supply voltage grequency 1 Rated value Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage frequency **A to 60 Hz Rated value** • at 60 Hz Rated value • at 60 Hz Rated val	Relative positive tolerance of the operating frequency	%	10
at standard circuit Relative positive tolerance of the operating voltage at standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C Active power loss at operating current at 40 °C during operation typical Control electronics: Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth	Operating voltage at standard circuit Rated value	V	200 460
standard circuit Minimum load in % of LM Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C % 115 Active power loss at operating current at 40 °C during operation typical Control electronics: Type of voltage of the control supply voltage AC Control supply voltage frequency 1 Rated value Hz 50 Control supply voltage frequency 2 Rated value Hz 60 Relative negative tolerance of the control supply voltage frequency Control supply voltage frequency 9 Rated value Hz 60 Relative positive tolerance of the control supply voltage frequency Control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value V 230 • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal red Mechanical data: Size of engine control device S12 Width mm 160 Height mm 230 Depth mm 278		%	-15
Adjustable motor current for motor overload protection minimum rated value Continuous operating current [% of le] at 40 °C % 115 Active power loss at operating current at 40 °C during operation typical Control electronics: Type of voltage of the control supply voltage AC Control supply voltage frequency 1 Rated value Hz 50 Control supply voltage frequency 2 Rated value Hz 60 Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value V 230 • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Size of engine control device S12 Width mm 160 Height mm 230 Depth mm 278		%	10
protection minimum rated value Continuous operating current [% of le] at 40 °C % 115 Active power loss at operating current at 40 °C during operation typical W 125 Control electronics: Type of voltage of the control supply voltage AC Control supply voltage frequency 1 Rated value Hz 50 Control supply voltage frequency 2 Rated value Hz 60 Relative negative tolerance of the control supply voltage frequency	Minimum load in % of I_M	%	20
Active power loss at operating current at 40 °C during operation typical Control electronics: Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Point electronics: Control supply voltage frequency 2 Rated value Point engative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC at 50 Hz Rated value to 460 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth	•	А	131
Control electronics: Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Econtrol supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Size of engine control device Videth Relative Size of engine control device Fig. 12 Fig. 12 Fig. 13 Fig. 14 Fig. 15 Fig. 16 Fig. 16 Fig. 17 Fig. 16 Fig. 17	Continuous operating current [% of le] at 40 °C	%	115
Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Size of engine control device Width Height mm 230 Depth mm 278	Active power loss at operating current at 40 °C during	W	125
Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value v 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width In mm Median Me	operation typical		
Type of voltage of the control supply voltage Control supply voltage frequency 1 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value v 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width In mm Median Me	On the Laboration		'
Control supply voltage frequency 1 Rated value Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth Mechanical data: Size of mine value in the control supply mm 278			AC
Control supply voltage frequency 2 Rated value Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 278		Hz	
Relative negative tolerance of the control supply voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value voltage with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth			
voltage frequency Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth			
Relative positive tolerance of the control supply voltage frequency Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth		70	-10
voltage frequency Control supply voltage 1 with AC		%	10
Control supply voltage 1 with AC • at 50 Hz Rated value • at 60 Hz Rated value V 230 Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Wechanical data: Size of engine control device Width mm 160 Height mm 230 Depth			
● at 60 Hz Rated value Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width Height mm Depth V 230 10 10 10 10 10 10 10 10 10	Control supply voltage 1 with AC	_	
Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height Depth mm 278	• at 50 Hz Rated value	V	230
red Mechanical data: Size of engine control device Width Height Depth N 10 10 10 10 10 10 10 10 10	• at 60 Hz Rated value	٧	230
red Mechanical data: Size of engine control device Width Height Depth N 10 10 10 10 10 10 10 10 10	Relative negative tolerance of the control supply	%	-15
voltage with AC at 60 Hz Display version for fault signal Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth mm 278			
Display version for fault signal Wechanical data: Size of engine control device Width mm 160 Height mm 230 Depth mm 278	Relative positive tolerance of the control supply	%	10
Mechanical data: Size of engine control device Width mm 160 Height mm 230 Depth mm 278	voltage with AC at 60 Hz		
Size of engine control device S12 Width mm 160 Height mm 230 Depth mm 278	Display version for fault signal		red
Width mm 160 Height mm 230 Depth mm 278	Mechanical data:		
Height mm 230 Depth mm 278	Size of engine control device		S12
Depth mm 278	Width	mm	
	Height	mm	230
Mounting type screw fixing	Depth	mm	278
	Mounting type		screw fixing

mounting position		With additional fan: With vertical mounting surface +/- 90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
Required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
• downwards	mm	75
Installation altitude at height above sea level	m	5 000
Cable length maximum	m	300
Number of poles for main current circuit		3

Connections/ Terminals:	
Type of electrical connection	
for main current circuit	busbar connection
 for auxiliary and control current circuit 	screw-type terminals
Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	2
Number of CO contacts for auxiliary contacts	1
Type of connectable conductor cross-section for main contacts for box terminal using the front clamping point	
 finely stranded with core end processing 	70 240 mm²
 finely stranded without core end processing 	70 240 mm²
• stranded	95 300 mm²
Type of connectable conductor cross-section for main contacts for box terminal using the back clamping point	
 finely stranded with core end processing 	120 185 mm²
 finely stranded without core end processing 	120 185 mm²
• stranded	120 240 mm²
Type of connectable conductor cross-section for main contacts for box terminal using both clamping points	
 finely stranded with core end processing 	min. 2x 50 mm², max. 2x 185 mm²
 finely stranded without core end processing 	min. 2x 50 mm², max. 2x 185 mm²
• stranded	max. 2x 70 mm², max. 2x 240 mm²
Type of connectable conductor cross-section for AWG conductors for main contacts for box terminal	
 using the back clamping point 	250 500 kcmil
 using the front clamping point 	3/0 600 kcmil
 using both clamping points 	min. 2x 2/0, max. 2x 500 kcmil
Type of connectable conductor cross-section for DIN cable lug for main contacts	

70 240 mm²
2x (0.5 2.5 mm²)
2x (0.5 1.5 mm²)
2/0 500 kcmil
2x (20 14)
2x (20 16)

Ambient conditions:			
Ambient temperature			
during operation	°C	-25 + 60	
during storage	°C	-40 + 80	
Derating temperature	°C	40	
Protection class IP		IP00	

Certificates/ approvals:

General Product Approval	EMC	For use in
		hazardous
		locations













Test Certificates	Shipping Ap	pproval		other	
Special Test Certificate	J Å		Lloyd's Register	Declaration of Conformity	Environmental Confirmations
	DNV	GL	LRS		

UL/CSA ratings:		
yielded mechanical performance [hp] for three-phase		
AC motor		
● at 220/230 V		
— at standard circuit at 50 °C Rated value	metric hp	125
● at 460/480 V		

— at standard circuit at 50 °C Rated value	metric hp	250
Contact rating of the auxiliary contacts acc. to UL		B300 / R300

Further informatior

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW40756BB44


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW40756BB44

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW40756BB44&lang=en







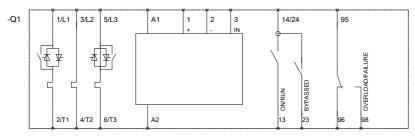

last modified: 27.04.2015