



Figure similar

CONTACTOR, 75KW/400V/AC-3, AC(40...60HZ)/DC OPERATION
UC 21...27.3V AUXIL. CONTACTS 2NO+2NC 3-POLE, SIZE S6
BAR CONNECTIONS ELECTRONIC OPERATING MECHANISM
WITH PLC INTERFACE 24V DC SCREW TERMINAL

product brand name	SIRIUS
Product designation	power contactor
General technical data:	
Size of contactor	S6
Insulation voltage	
• Rated value	1 000 V
Degree of pollution	3
Surge voltage resistance Rated value	8 kV
Mechanical service life (switching cycles)	
• of the contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Equipment marking	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q
Ambient conditions:	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C

- during storage

-55 ... +80 °C

Main circuit:

Number of poles for main current circuit	3
Number of NC contacts for main contacts	0
Number of NO contacts for main contacts	3
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	70 mm²
• at 40 °C minimum permissible	95 mm²
Operating current	
• at AC-1 at 400 V — at ambient temperature 40 °C Rated value	185 A
• at AC-1 up to 690 V — at ambient temperature 40 °C Rated value — at ambient temperature 60 °C Rated value	185 A 160 A
• at AC-3 — at 400 V Rated value — at 690 V Rated value	150 A 150 A
• at AC-4 at 400 V Rated value	132 A
Operating current for ≥ 200000 operating cycles at AC-4	
• at 400 V Rated value	68 A
• at 690 V Rated value	57 A
Operating current	
• with 1 current path at DC-1 — at 24 V Rated value — at 110 V Rated value	160 A 18 A
• with 2 current paths in series at DC-1 — at 24 V Rated value — at 110 V Rated value	160 A 160 A
• with 3 current paths in series at DC-1 — at 24 V Rated value — at 110 V Rated value	160 A 160 A
Operating current	
• with 1 current path at DC-3 at DC-5 — at 24 V Rated value — at 110 V Rated value	160 A 2.5 A
• with 2 current paths in series at DC-3 at DC-5 — at 110 V Rated value — at 24 V Rated value	160 A 160 A
• with 3 current paths in series at DC-3 at DC-5	

— at 110 V Rated value	160 A
— at 24 V Rated value	160 A
Operating power	
• at AC-1	
— at 230 V at 60 °C Rated value	60 kW
— at 690 V at 60 °C Rated value	181 kW
Operating power for ≥ 200000 operating cycles at AC-4	
• at 400 V Rated value	38 kW
• at 690 V Rated value	55 kW
Thermal short-time current restricted to 10 s	1 300 A
Active power loss at AC-3 at 400 V for rated value of the operating current per conductor	9 W
No-load switching frequency	
• with AC	2 000 1/h
• for DC	2 000 1/h
Operating frequency	
• at AC-1 maximum	800 1/h
• at AC-2 maximum	300 1/h
• at AC-3 maximum	750 1/h
• at AC-4 maximum	130 1/h

Control circuit/ Control:

Type of voltage of the control supply voltage	AC/DC
Control supply voltage with AC	
• at 50 Hz Rated value	21 ... 27.3 V
• at 60 Hz Rated value	21 ... 27.3 V
Control supply voltage for DC	
• Rated value	21 ... 27.3 V
• Rated value	40 Hz
Control supply voltage frequency 2 Rated value	60 Hz
Operating range factor control supply voltage rated value of the magnet coil with AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
Operating range factor control supply voltage rated value of the magnet coil for DC	0.8 ... 1.1
Design of the surge suppressor	with varistor
Apparent pick-up power of the magnet coil with AC	280 V·A
Inductive power factor with closing power of the coil	0.8
Apparent holding power of the magnet coil with AC	4.4 V·A
Inductive power factor with the holding power of the coil	0.4
Closing power of the magnet coil for DC	320 W

Holding power of the magnet coil for DC	2.8 W
Closing delay	
• with AC	35 ... 75 ms
• for DC	35 ... 75 ms
Arcing time	10 ... 15 ms

Auxiliary circuit:

Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	2
Number of NO contacts	
• for auxiliary contacts	
— instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V Rated value	6 A
• at 400 V Rated value	3 A
Operating current at DC-12	
• at 60 V Rated value	6 A
• at 110 V Rated value	3 A
• at 220 V Rated value	1 A
Operating current at DC-13	
• at 24 V Rated value	10 A
• at 60 V Rated value	2 A
• at 110 V Rated value	1 A
• at 220 V Rated value	0.3 A

UL/CSA ratings:

Contact rating of the auxiliary contacts acc. to UL	A600 / Q600
--	-------------

Short-circuit:

Design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of assignment 1 required	fuse gL/gG: 355 A
— with type of assignment 2 required	fuse gL/gG: 315 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions:

Mounting type	screw fixing
• Side-by-side mounting	Yes
Height	172 mm
Width	120 mm
Depth	170 mm
Required spacing	

- for grounded parts
— at the side

10 mm

Connections/ Terminals:

Type of electrical connection	
• for main current circuit • for auxiliary and control current circuit	screw-type terminals screw-type terminals
Type of connectable conductor cross-section	
• for AWG conductors for main contacts	4 ... 250 kcmil
Type of connectable conductor cross-section	
• for auxiliary contacts — solid — finely stranded with core end processing • for AWG conductors for auxiliary contacts	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
 CSA  UL  EAC	Type Examination	 EG-Konf.	Special Test Certificate

Test Certificates	Shipping Approval	other
Type Test Certificates/Test Report	 ABS  DNV  GL  RMRS	Environmental Confirmations

other
other Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT10556NB36>

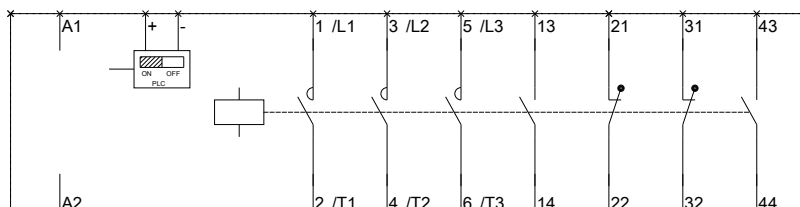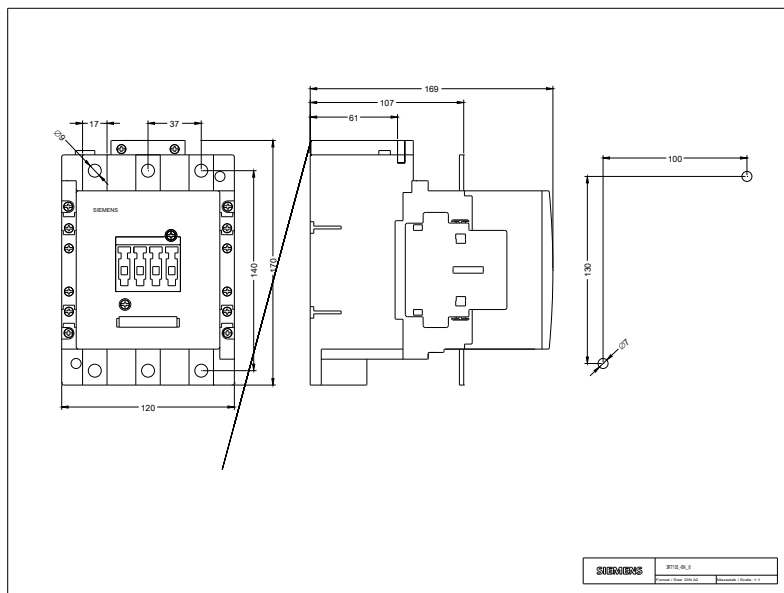

last modified:

02.06.2015